



Inspur LED Indoor Transparent Screen

The slim and lightweight design concept, along with the high-definition and transparent display attributes, not only suits the retail industry but also performs well in various commercial display applications.

Light, thin and simple

Lightweight at 8 kg/m² and thickness as thin as 68 mm



Hidden cable connection

Hidden cable connection without spoiling the overall aesthetic appeal



Vivid and high-definition


The screen presents the three-dimensional sense and realism of the space



Ultra-fast and simple installation
The cabinet connection adopts modular plug-in components, enabling cableless connection between upper and lower cabinets for a neat and beautiful appearance



Multiple installation methods: Can be hoisted or base-mounted according to specific environments and requirements

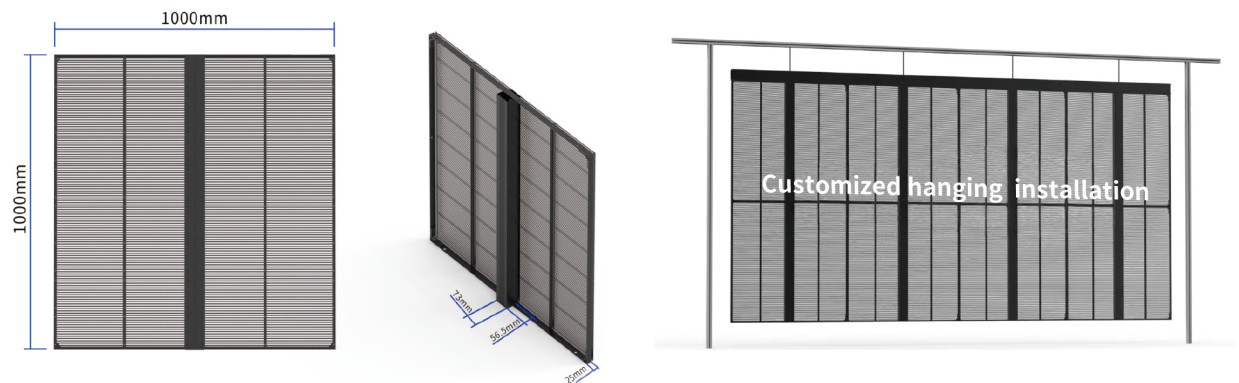

Product Parametes

Display parameter	3.9-7.8 Low brightness	3.9-7.8 Normal brightness	3.9-7.8 High brightness
LED light beads	SMD2020	SMD1921	SMD1921
Cabinet size (mm)	1000*1000、1000*500 500*1000、500*500	1000*1000、1000*500 500*1000、500*500	1000*1000、1000*500 500*1000、500*500
Display resolution	256*128	256*128	256*128
Optical parameters			
White balance brightness (cd/m²)	≥800	≥2000	≥4500
Average power consumption (W/m²)	144/ 288	144/ 288	288
Permeability	≥60%	≥60%	≥60%
Refresh rate (hz)	≥1920 / ≥3840	≥1920 / ≥3840	≥1920 / ≥3840
Use parameters			
Installation method	Hanging	Hanging	Hanging
Cabinet weight (kg/piece)	7±0.5	7±0.5	7±0.5
Lifetime typical value (hrs)	100000	100000	100000

Note: The above parameters are only for reference and not as the final delivery basis. The products can be produced in a customized way according to the demands

Application Scenarios

